


# AZ695

## SENSITIVE SUBMINIATURE RELAY

### FEATURES

- Extremely small footprint
- Thin vertical profile
- 1 Form A contact up to 5 Amp switching capability
- High sensitivity, 100 mW pickup
- Dielectric strength 3000 Vrms contact to coil
- Epoxy sealed
- UL file E44211
- CSA file 74461



### CONTACTS

<b>Arrangement</b>	SPST (1 Form A)
<b>Ratings</b>	Resistive load: Max. switched power: 150 W or 1250 VA Max. switched current: 5 A Max. switched voltage: 150 VDC* or 250 VAC Inductive load (p.f. = 0.40, L/R = 7 ms) 2 A at 250 VAC, 30 VDC
<b>UL, CSA</b>	5 A at 30 VDC resistive 5 A at 250 VAC general use 1/10 HP 120 VAC * Note: If switching voltage is greater than 30 VDC, special precautions must be taken. Please contact the factory.
<b>Material</b>	Options: Silver cadmium oxide Silver cadmium oxide with gold plating
<b>Resistance</b>	< 30 milliohms initially

### COIL

<b>Power</b>	
<b>At Pickup Voltage (typical)</b>	100 mW
<b>Max. Continuous Dissipation</b>	550 mW at 20°C (68°F) ambient
<b>Temperature Rise</b>	25°C (45°F) at nominal coil voltage
<b>Temperature</b>	Max. 105°C (221°F)

### NOTES

1. All values at 20°C (68°F).
2. Relay may pull in with less than "Must Operate" value.
3. Minimum permissible contact load: AgCdO contact: 100 mA at 5 VDC AgCdO contact with gold plating: 10 mA at 5 VDC
4. Specifications subject to change without notice.

### GENERAL DATA

<b>Life Expectancy</b> <b>Mechanical</b> <b>Electrical</b>	Minimum operations 2 X 10 <sup>7</sup> operations 1 X 10 <sup>5</sup> at 5 A, 30 VDC or 250 VAC Res.
<b>Operate Time (typical)</b>	6 ms at nominal coil voltage
<b>Release Time (typical)</b>	3 ms at nominal coil voltage (with no coil suppression)
<b>Dielectric Strength (at sea level for 1 min.)</b>	750 Vrms between open contacts 3000 Vrms contact to coil
<b>Insulation Resistance</b>	100 megohms min. at 20°C, 500 VDC, 50% RH
<b>Dropout</b>	Greater than 10% of nominal coil voltage
<b>Ambient Temperature</b> <b>Operating</b> <b>Storage</b>	At nominal coil voltage -40°C (-40°F) to 70°C (158°F) -40°C (-40°F) to 105°C (221°F)
<b>Vibration</b>	0.062" (1.5 mm) DA at 10–55 Hz
<b>Shock</b>	10 g
<b>Enclosure</b>	P.B.T. polyester
<b>Terminals</b>	Tinned copper alloy, P.C.
<b>Max. Solder Temp.</b>	270°C (518°F)
<b>Max. Solder Time</b>	5 seconds
<b>Max. Solvent Temp.</b>	80°C (176°F)
<b>Max. Immersion Time</b>	30 seconds
<b>Weight</b>	3 grams
<b>Packing unit in pcs</b>	25 per plastic tube / 1000 per carton box

ZETTLER electronics GmbH

Junkersstrasse 3, D-82178 Puchheim, Germany

Tel. +49 89 800 97 0  
Fax +49 89 800 97 200


office@ZETTLERelectronics.com  
www.ZETTLERelectronics.com

# AZ695

## RELAY ORDERING DATA

COIL SPECIFICATIONS				ORDER NUMBER	
Nominal Coil VDC	Must Operate VDC	Max. Continuous VDC	Coil Resistance Ohm $\pm 10\%$	AgCdO Contact	AgCdO with Gold Plating Contact
5	3.5	8.4	125	AZ695-5	AZ695-5G
6	4.2	10.1	180	AZ695-6	AZ695-6G
9	6.3	15.2	405	AZ695-9	AZ695-9G
12	8.4	20.2	720	AZ695-12	AZ695-12G
18	12.6	29.5	1,620	AZ695-18	AZ695-18G
24	16.8	40.5	2,880	AZ695-24	AZ695-24G

## MECHANICAL DATA

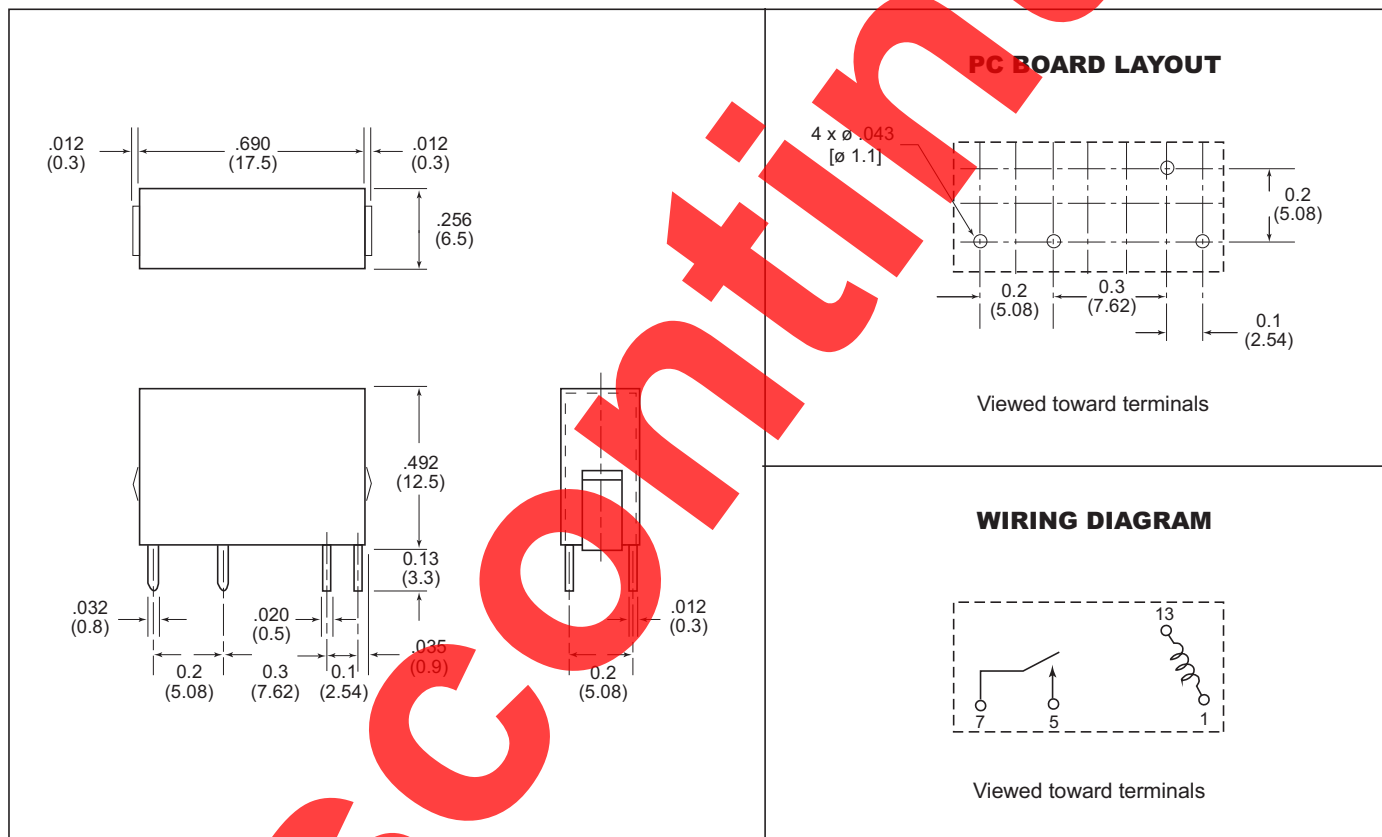

Dimensions in inches with metric equivalents in parentheses. Tolerance:  $\pm .010$ "

ZETTLER electronics GmbH

Junkersstrasse 3, D-82178 Puchheim, Germany

Tel. +49 89 800 97 0  
Fax +49 89 800 97 200

office@ZETTLERelectronics.com  
www.ZETTLERelectronics.com