

AZ956P

MICROMINIATURE POLARIZED BISTABLE (LATCHING) RELAY

FEATURES

- Microminiature size: up to 50% less board area than previous generation telecom relays
- Meets FCC Part 68.302 1500 V lightning surge
- High dielectric and surge voltage:
- Low power consumption: 36 mW pickup
- Stable contact resistance for low level signal switching
- Epoxy sealed
- UL, CUR file E43203
- All plastics meet UL94 V-O, 30 min. oxygen index



CONTACTS

Arrangement	SPDT (1 Form C) Bifurcated crossbar contacts
Ratings	Resistive load: Max. switched power: 30 W or 60 VA Max. switched current: 1.0 A Max. switched voltage: 150 VDC or 125 VAC
Rated Load UL, CUR	0.5 A at 120 VAC 1.0 A at 30 VDC
Material	Palladium nickel with gold-rhodium overlay
Resistance	< 50 milliohms initially (6 V, 10 mA method)

COIL (Polarized)

Power At Pickup Voltage (typical)	36 mW
Max. Continuous Dissipation	0.5 W at 20°C (68°F)
Temperature Rise	At nominal coil voltage 8°C (15°F)
Temperature	Max. 105°C (221°F)

NOTES

1. All values at 20°C (68°F).
2. Relay may set or reset in with less than "Must Operate" value.
3. Relay has fixed coil polarity.
4. Specifications subject to change without notice.

GENERAL DATA

Life Expectancy Mechanical Electrical	Minimum operations 1 x 10 ⁹ 2.5 x 10 ⁵ at 0.4 A, 125 VAC, resistive 3 x 10 ⁶ at 1.0 A, 24 VDC, resistive
Set Time (typical)	1 ms at nominal coil voltage
Reset Time (typical)	0.9 ms at nominal coil voltage
Bounce (typical)	At 10 mA contact current 1 ms at set or reset
Dielectric Strength (at sea level)	1500 Vrms contact to coil 500 Vrms between open contacts
Insulation Resistance	10 ⁹ ohms min. at 25°C, 500 VDC, 50% RH
Ambient Temperature Operating Storage	At nominal coil voltage -40°C (-40°F) to 70°C (158°F) -40°C (-40°F) to 105°C (221°F)
Vibration	Operational, 40 g, 10–200 Hz
Shock	Operational, 50 g min., 11 ms Non-destructive, 150 g min., 11 ms
Max. Solder Temp. Temp./Time	Vapor phase: 215°C, 40 Sec. Infrared: 215°C, 40 Sec. Double wave: 260°C, 10 Sec.
Max. Solvent Temp.	80°C (176°F)
Max. Immersion Time	30 seconds
Weight	1.8 grams
Enclosure	P.B.T. polyester
Terminals	Tinned copper alloy, P.C.

ZETTLER electronics GmbH

Junkersstrasse 3, D-82178 Puchheim, Germany

Tel. +49 89 800 97 0
Fax +49 89 800 97 200

office@ZETTLERelectronics.com
www.ZETTLERelectronics.com

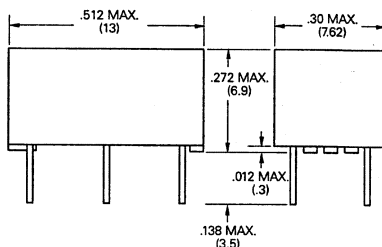
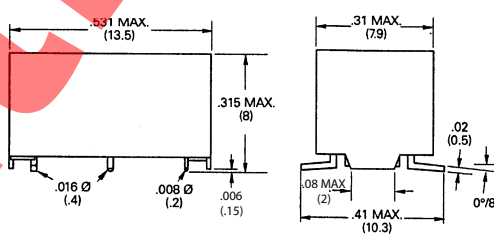




AZ956P

RELAY ORDERING DATA

STANDARD SINGLE COIL				Order Number	
Nominal Coil VDC	Max. Operating VDC	Coil Resistance $\pm 10\%$	Must Operate VDC	THT Through Hole	SMT
1.5	6	61	1.13	AZ956P1-1.5DE	AZ956P1S-1.5DE
3	13	300	2.25	AZ956P1-3DE	AZ956P1S-3DE
5	20	740	3.75	AZ956P1-5DE	AZ956P1S-5DE
9	35	2,160	6.75	AZ956P1-9DE	AZ956P1S-9DE
12	50	4,500	9.00	AZ956P1-12DE	AZ956P1S-12DE
15	50	4,500	11.30	AZ956P1-15DE	AZ956P1S-15DE
24	50	4,500	18.00	AZ956P1-24DE	AZ956P1S-24DE

STANDARD DUAL COIL				Order Number	
Nominal Coil VDC	Max. Operating VDC	Coil Resistance $\pm 10\%$	Must Operate VDC	THT Through Hole	SMT
1.5	4.25	32	1.13	AZ956P2-1.5DE	AZ956P2S-1.5DE
3	8.55	130	2.25	AZ956P2-3DE	AZ956P2S-3DE
5	14.75	390	3.75	AZ956P2-5DE	AZ956P2S-5DE
9	25.60	1,200	6.75	AZ956P2-9DE	AZ956P2S-9DE
12	29.00	1,500	9.00	AZ956P2-12DE	AZ956P2S-12DE
15	29.00	1,500	11.30	AZ956P2-15DE	AZ956P2S-15DE

MECHANICAL DATA

<p>THT</p> 	<p>SMT</p> 
<p>PC BOARD LAYOUT Viewed toward terminals</p> 	<p>PC BOARD LAYOUT Viewed toward terminals</p> 
<p>Wiring Diagram Viewed toward terminals</p> <p>Single Coil Latching Shown in reset Position</p> 	<p>Dual Coil Latching Shown in reset position</p> 

Dimensions in inches with metric equivalents in parentheses. Tolerance: $\pm .010$ "

ZETTLER electronics GmbH

Junkersstrasse 3, D-82178 Puchheim, Germany

Tel. +49 89 800 97 0

Fax +49 89 800 97 200

office@ZETTLERelectronics.com

www.ZETTLERelectronics.com